

EX 221 – SD 250

TECHNICAL SPECIFICATIONS

Excavator size	> 8 ton
Drill mast	Speedy Drill 250 Gear Box
Stroke	Standard 2300 (option 3300 max)
Pull back / down	1.500 Kg
Base frame and Kinematic	Include plate to attach to your excavator with: <ul style="list-style-type: none"> • Single slew WDL 343 for mast rotation (180°+180°) • Back feed 700 mm • Side chain guide for hoses
Hydraulics	5 proportional valves (rotation/ percussion/ feed/ slew/ back feed)
Controls	Radio remote control and LCD screen for diagnostic and setting
Centralizer	Manual centralizer included
Data log	On request

MAIN FRAME ACCESSORIES AND OPTIONS

90° cylinder mounted before slew for extra mast inclination
Extra slew 343 DM unit with 90° structure for extra mast inclination
Spider excavator foot main frame
180° actuator for side mast rotation

DRILL MAST ACCESSORIES AND OPTIONS

Clamp and break device	<ul style="list-style-type: none"> • 55-152; 55-180 • Manual centralizer for 2", 3" or 4"
Slidramatic	Rotary head lateral movement
Winch	800 Kg winch with pulley
Water pump	25 lt at 40 bars
Lubricator	1 lt – 6 lt




SAFETY GARD OPTIONS

Manual	Manual opening type
Electronic	Electronic front guard and lateral steel guard
Hydraulic	Corner opening hydraulic type

ROTARY HEADS AND DRIFTERS

Rotary heads	RP100 / RP200 / RP500
Drifters	<ul style="list-style-type: none"> • EURODRILL RH1X – RH2X – RH3X • Floating spindle kit for DTH available • Doofor 430 X / 530 X / 538L

SLEW + 90° CYLINDER VERSION

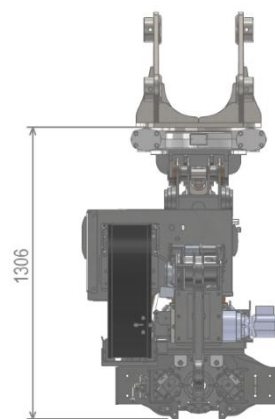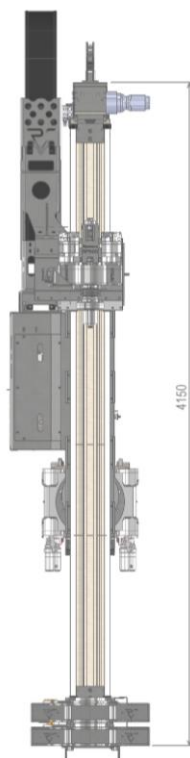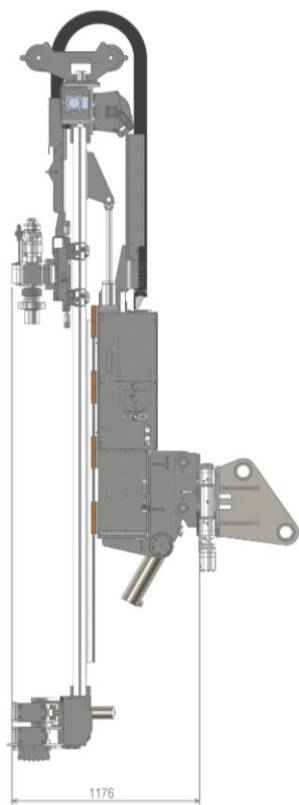

DOUBLE SLEW VERSION

